


# PLAN

Scale:  $1\frac{1}{2}$ " = 1'-0"

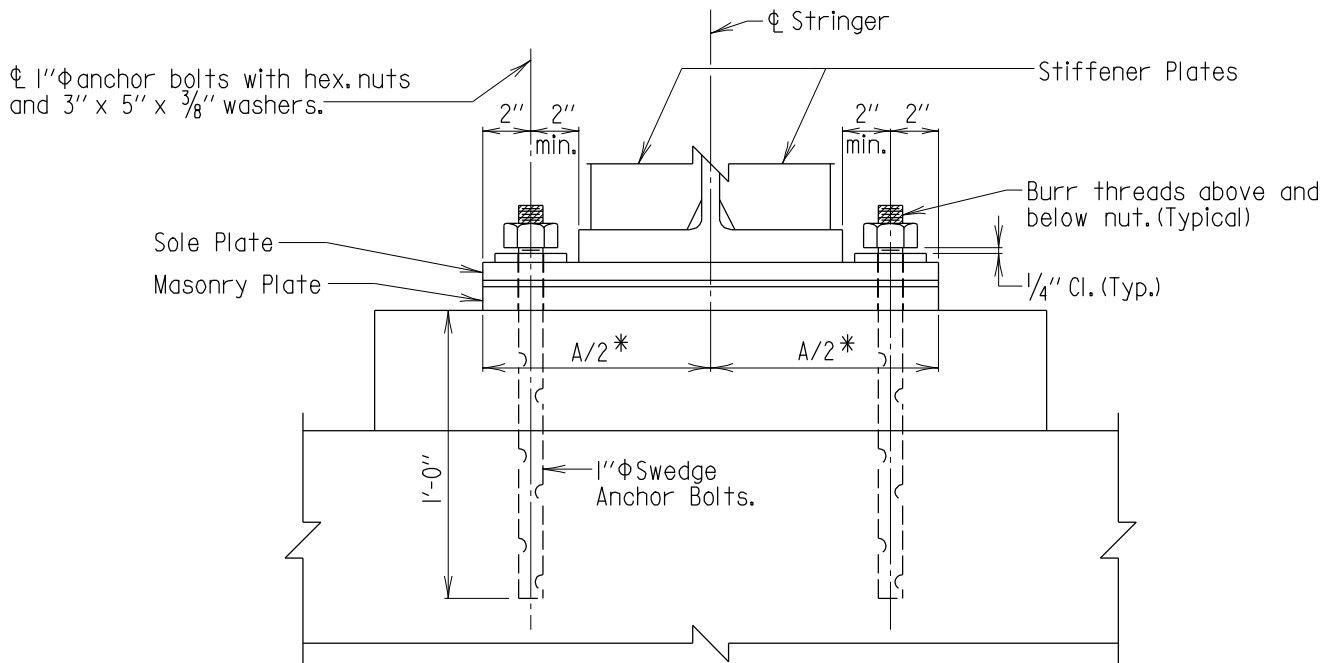

# ELEVATION

Scale:  $1\frac{1}{2}$ " = 1'-0"

**NOTE TO DESIGNER:**  
Grade 36 bearings are to be used in bridge rehabilitation projects only.

\* Edges may be left as cut or cast.

\*\* Where bridge is not skewed,  $\phi$  Brg. and  $\phi$  shoe are coincident.

APPROVAL	
<i>L.S. Friedman</i>	DIRECTOR
OFFICE OF STRUCTURES	
DATE: 5/18/81	
REVISIONS	
SHA	FHWA
6-9-94	6-8-90
3-21-95	.
11-17-99	.
7-26-06	.

FHWA APPROVAL  
DATE: 6-8-90

STATE OF MARYLAND  
DEPARTMENT OF TRANSPORTATION  
STATE HIGHWAY ADMINISTRATION  
OFFICE OF STRUCTURES

EXPANSION BEARING  
SHORT LENGTH SPANS  
(GRADE 36 STEEL)

STANDARD NO. BR-SS(9.03)-81-128

SHEET 1 OF 2